


## STAINLESS STEEL LOW PRESSURE FLEXIBLE COUPLING

Designed for low pressure MF/UF/RO systems. 304SST, sizes from ¾" to 3", maximum working pressure 350 psi, cut groove.

- 304 stainless steel – ASTM A351 CF8
- EPDM gaskets
- Bolts/nuts – 304 SST, round head, elliptoid neck, carriage bolts and nuts

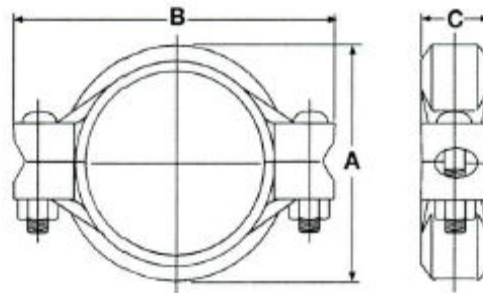

Nominal Size	Pipe OD (inches)	Dimensions			Weight (pounds)
		A (inches)	B (inches)	C (inches)	
¾"	1.060	1.850	3.310	1.615	0.75
1"	1.315	2.050	3.543	1.615	0.75
1-1/4"	1.670	2.400	3.925	1.654	0.90
1-1/2"	1.900	2.638	4.185	1.654	0.90
2"	2.375	3.189	4.764	1.654	1.10
2-1/2"	2.875	3.858	5.800	1.693	1.65
3"	3.500	4.370	6.335	1.693	1.90

Available by special order:

- 316SST
- 600 psi
- Super Duplex
- Sizes to 12"