

FLOW METERS

PANEL




IN-LINE



Technical Specifications	
Range	1 GPM to 200 GPM
Maximum Pressure	150 PSI
Maximum Temperature	176° F
Body Material	Lucite (acrylic)
Float Material	316L SST
Guide Rod Material	316L SST
Connection Material	ABS plastic
Connection Type	NPT


Panel Flow Meters

Model	GPM	Connection	A	B	C
LZT-1001	0.1 – 1.0	1/2" NPT	5.00	1.40	2.65
LZT-1001-V (valve)	0.1 – 1.0	1/2" NPT	5.00	1.40	2.65
LZT-1002	0.2 – 2.0	1/2" NPT	5.00	1.40	2.65
LZT-1002-V (valve)	0.2 – 2.0	1/2" NPT	5.00	1.40	2.65
LZT-1005	0.5 – 5.0	1/2" NPT	5.00	1.40	2.65
LZT-1005-V (valve)	0.5 – 5.0	1/2" NPT	5.00	1.40	2.65
LZT-2510	1 – 10	1" NPT	6.50	1.75	3.35
LZT-2520	2 – 20	1" NPT	6.50	1.75	3.35

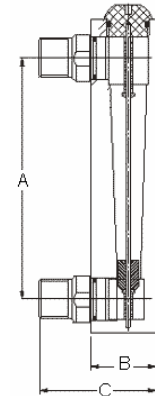

In-Line Flow Meters

Model	GPM	Connection	A	B	C
LZT-1001-G	0.1 – 1.0	3/8" NPT	6.30	8.30	1.25
LZT-1002-G	0.2 – 2.0	1/2" NPT	6.30	8.30	1.25
LZT-1005-G	0.5 – 5.0	1/2" NPT	6.30	8.30	1.25
LZT-2510-G-S	1 – 10	1" NPT	9.00	11.60	1.75
LZT-2520-G-S	2 – 20	1" NPT	9.00	11.60	1.75
LZT-4004-G-S	4 – 40	1-1/2" NPT	9.05	11.90	2.70
LZT-4006-G-S	6 – 60	1-1/2" NPT	9.05	11.90	2.70
LZT-4008-G-S	8 – 80	1-1/2" NPT	9.05	11.90	2.70
LZT-4010-G-S	10 – 100	1-1/2" NPT	9.05	11.90	2.70
LZT-5015-G	50 – 150	2" NPT	12.20	15.00	3.75
LZT-5020-G	40 – 200	2-1/2" NPT	12.20	15.00	3.75

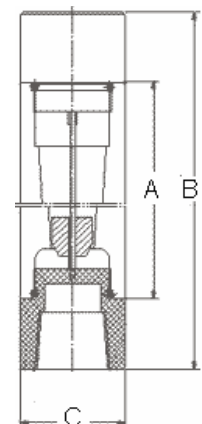

Southeast (FL)
T 904-425-8023
F 904-425-8024
jireland@ewp-usa.com

Warehouse:
Jacksonville, FL
sales@ewp-usa.com

Northeast (MD)
T 443-451-5056
F 443-451-4378
jarmon@ewp-usa.com