

## IN-LINE FLOW METERS

Range – from 1 GPM to 200 GPM

Maximum pressure – 150 PSI

Maximum Temperature – 176° F


Body Material – Lucite

Float Material – 316L SST

Guide Rod Material – 316L SST

Connection Material – ABS

Connection Type - NPT

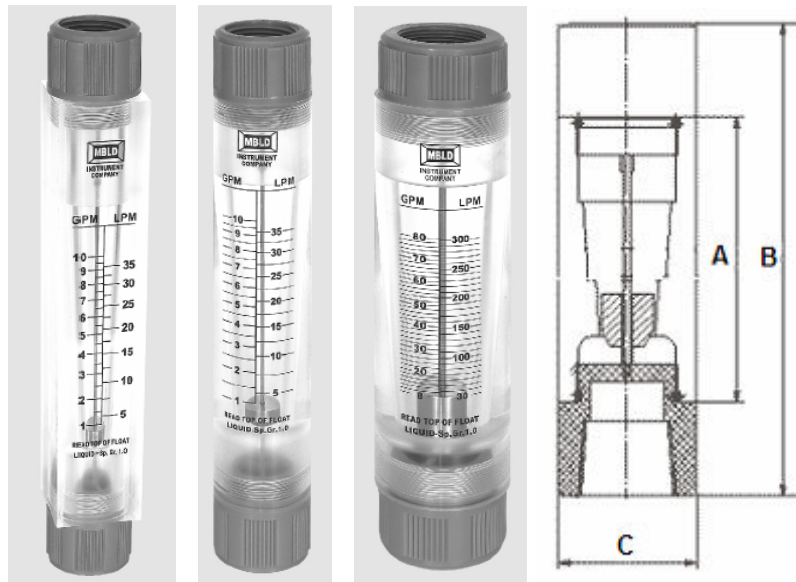

Model	GPM	Connection	A	B	C
LZT-1001-G	0.1 – 1.0	3/8" NPT	6.30	8.30	1.25
LZT-1002-G	0.2 – 2.0	1/2" NPT	6.30	8.30	1.25
LZT-1005-G	0.5 – 5.0	1/2" NPT	6.30	8.30	1.25
LZT-2510-G-S	1 – 10	1" NPT	9.00	11.60	1.75
LZT-2520-G-S	2 – 20	1" NPT	9.00	11.60	1.75
LZT-4004-G-S	4 – 40	1-1/2" NPT	9.05	11.90	2.70
LZT-4006-G-S	6 – 60	1-1/2" NPT	9.05	11.90	2.70
LZT-4008-G-S	8 – 80	1-1/2" NPT	9.05	11.90	2.70
LZT-4010-G-S	10 – 100	1-1/2" NPT	9.05	11.90	2.70
LZT-5015-G	50 – 150	2" NPT	12.20	15.00	3.75
LZT-5020-G	40 – 200	2-1/2" NPT	12.20	15.00	3.75

**Southeast (FL)**  
**T 904-425-8023**  
**F 904-425-8024**  
**jireland@ewp-usa.com**

**Warehouse:**  
**Jacksonville, FL**  
**sales@ewp-usa.com**

**Northeast (MD)**  
**T 443-451-5056**  
**F 443-451-4378**  
**jlarmon@ewp-usa.com**