



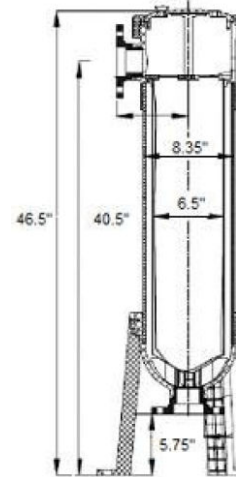

PVC CARTRIDGE AND BAG HOUSINGS

Thermoplastic polymer housings provide economical filtration solutions with high quality, durability, and UV resistance. Temperature range from 40° F to 120° F. Operating pressure 85 psi to 100 psi, tested to 217 psi. Two 1/4" NPT ports in top cover – one for pressure gauge (not included) and one for vent (included). Mounting stands/feet included. Wrench included. Cartridge housings have 1-1/2" PVC pipe glue-in socket connections with unions. Bag housings have 2" ANSI flange (included but not shown below).

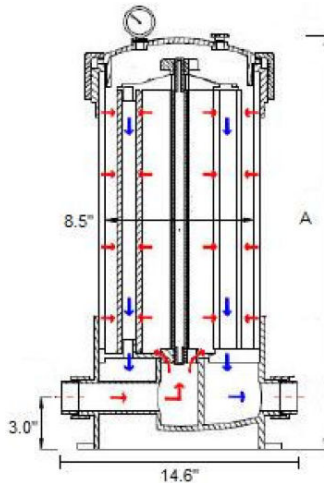

Model	Cartridge		(A) Height	Flow Rate
	Length	Qty		
HDFC-5DC2	20"	5	27.5"	31 GPM
HDFC-5DC3	30"	5	37.5"	44 GPM
HDFC-5DC4	40"	5	47.5"	57 GPM

Model	#2 Bag		Flow Rate
	Length	Qty	
HXP-BF-1-2	32"	1	175 GPM

Southeast (FL)
T 904-425-8023
F 904-425-8024
jireland@ewp-usa.com

Warehouse:
Jacksonville, FL
sales@ewp-usa.com

Northeast (MD)
T 443-451-5056
F 443-451-4378
jarmon@ewp-usa.com