




## STAINLESS STEEL MEMBRANE HOUSINGS



### Materials of Construction

End Cap	GFN Glass Fiber Noryl™
O-ring	EPDM
Housing Body	304 SS seamless tube
Clamp Hardware	304 SS electropolished

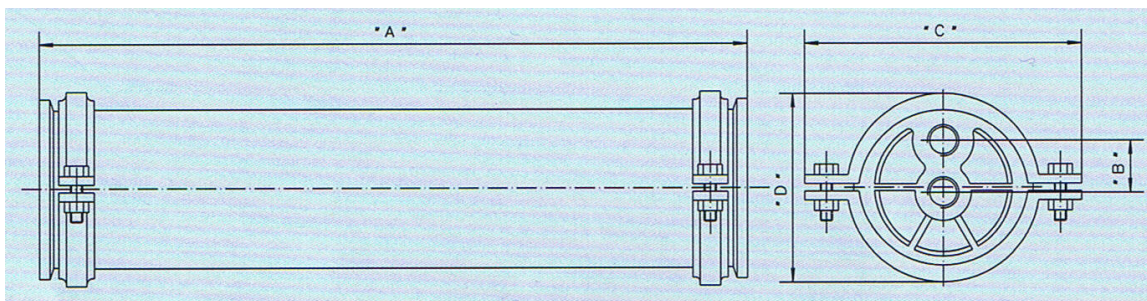

Housing Length (# of elements)	A		B		C		D		Weight	
	inch	mm	inch	mm	inch	mm	inch	mm	lbs	kgs
1 – 2.5x21	22.7	577	0.9	23	4.2	107	3.0	76	3	1.4
1 – 2.5x40	41.7	1059	0.9	23	4.2	107	3.0	76	8	3.6
1 – 4x21	23.6	600	1.3	34	7.2	185	5.1	130	9	4.2
1 – 4x40	42.6	1082	1.3	34	7.2	185	5.1	130	16	6.8
2 – 4x40	82.6	2098	1.3	34	7.2	185	5.1	130	27	12.3
3 – 4x40	122.6	3114	1.3	34	7.2	185	5.1	130	39	17.6

SPECIFICATIONS	2.5 inch	4-inch
Housing ID	2.45 inch (63 mm)	4.02 inch (102 mm)
Housing OD	2.53 inch (67 mm)	4.15 inch (105.5 mm)
FNPT Feed Port	0.375 inch (10 mm)	0.75 inch (19 mm)
FNPT Permeate Port	0.25 inch (6 mm)	0.50 inch (13 mm)
Clamp Torque	45 lb/inch	140 lb/inch
OD Finish	Mechanical Polish	Mechanical Polish

**Southeast (FL)**  
**T 904-425-8023**  
**F 904-425-8024**  
[jireland@ewp-usa.com](mailto:jireland@ewp-usa.com)

**Warehouse:**  
**Jacksonville, FL**  
[sales@ewp-usa.com](mailto:sales@ewp-usa.com)

**Northeast (MD)**  
**T 443-451-5056**  
**F 443-451-4378**  
[jarmon@ewp-usa.com](mailto:jarmon@ewp-usa.com)