

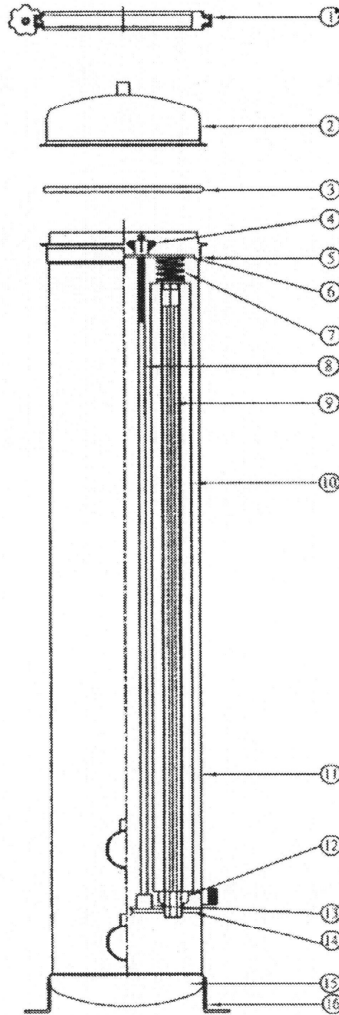


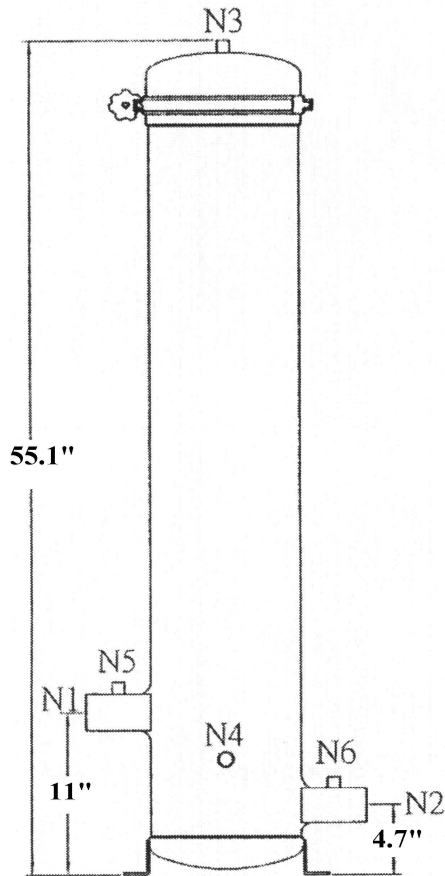

## TK Series - TK5-40

### 5 ROUND 40" LOW PRESSURE FILTER CARTRIDGE HOUSING

Material	304SST standard / 316SST and 316LSST option
Connections	2"NPTM standard / 2.5", 3", and Flange option
O-ring	EPDM standard / VITON option
Finish	Electro-Polished
Operating Pressure	100PSI
Maximum Pressure	142PSI
Design Temperature	212°F

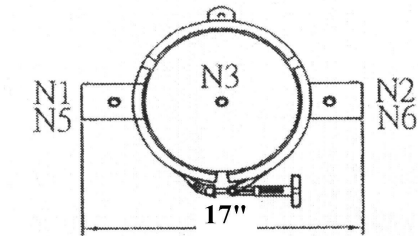

No.	Description
1	Clamp
2	Top
3	O-ring
4	Nut
5	Flange
6	Cartridge Plate
7	Springs
8	Cartridge Rod
9	Cartridge Guide Rod
10	Cartridge
11	Shell
12	Cartridge Bowl
13	Nut
14	Cartridge Support Plate
15	Bottom
16	Support Legs

Connections	
N1	2"NPTM
N2	2"NPTM
N3	1/4"NPTF
N4	3/4"NPTM
N5	1/4"NPTF
N6	1/4"NPTF