




## TS SERIES

### SINGLE CARTRIDGE FILTER HOUSING

|                    |                                   |
|--------------------|-----------------------------------|
| Material           | 304SST standard / 316SST option   |
| Connections        | 3/4"NPTF standard / 1"NPTF option |
| O-ring             | EPDM standard / VITON option      |
| Finish             | Electro-Polished                  |
| Operating Pressure | 142PSI                            |
| Maximum Pressure   | 170PSI                            |
| Design Temperature | 212°F                             |

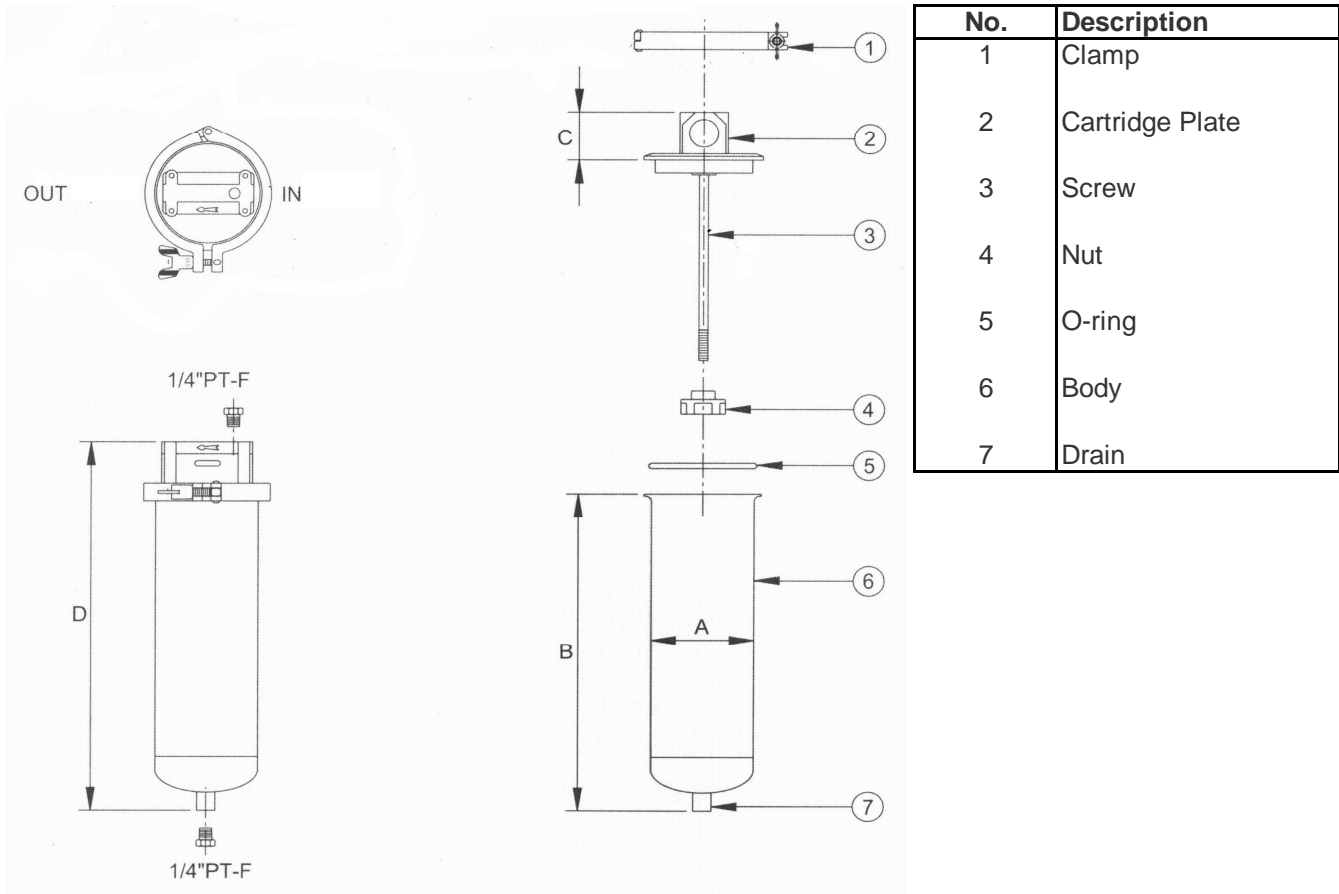

| No. | Description     |
|-----|-----------------|
| 1   | Clamp           |
| 2   | Cartridge Plate |
| 3   | Screw           |
| 4   | Nut             |
| 5   | O-ring          |
| 6   | Body            |
| 7   | Drain           |

| Model | IN/OUT    | A    | B     | C    | D     | GPM | Weight  |
|-------|-----------|------|-------|------|-------|-----|---------|
| T-1   | 3/4" NPTF | 4.2" | 13.6" | 2.0" | 15.8" | 5   | 9 lbs.  |
| T-2   | 1" NPTF   | 4.2" | 23.4" | 2.0" | 25.6" | 10  | 12 lbs. |
| T-3   | 1" NPTF   | 4.2" | 33.3" | 2.0" | 35.4" | 15  | 33 lbs. |