


UF8040-20k

Brief Introduction

The VUF series is mainly used for separation and concentration of specific material with molecular weight cut off (MWCO) at 4k, 6k, 8k, 10k, 20k, 67k Da. VUF series applies the feed channel spacer of 31, 46 and 90mil, and is favorably equipped with the fiberglass housing or sanitary-grade housing.

Model	Active Membrane Area ft ² (m ²)	Permeate Flow GPD(m ³ /d)	Testing Solution
VUF8040-20K/31F	400 (37.2)	10500 (39.7)	PEG20000
Testing Conditions	Operating pressure 40 psi (0.28Mpa) Temperature at 25°C Tested in 1000 mg/L solution Recovery rate at 15%		
Operation	Maximum operating pressure Maximum feedwater flow Maximum feedwater temperature Maximum feedwater flow SDI ₁₅		300psi (2.07Mpa) 84gpm (19 m ³ /h) 40°C 5
Limits & Conditions	Allowed pH range for feedwater in operation Allowed pH range for chemical cleaning Maximum concentration of free chlorine Maximum pressure drop per element		3~10 2~12 <0.1ppm 15psi (0.1Mpa)

Size of Membrane Element: 1.0 inch = 25.4 mm

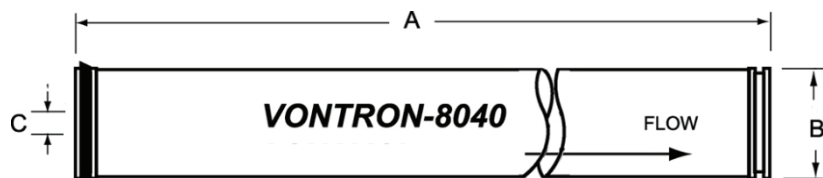

A/mm(inch)	B/mm(inch)	C/mm(inch)
1016 (40)	201 (7.9)	29 (1.125)